






METALDECK

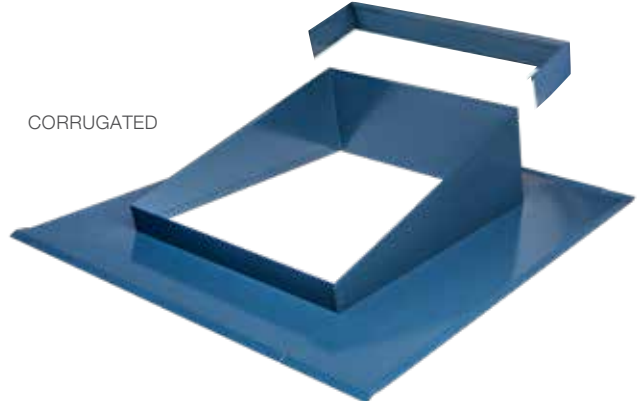

CORRUGATED



ROOF PITCH

- Roof pitch range:**  **0°-8°** Use the V15 Flashing that is pitched at 15°
 **9°-14°** Use the V7 Flashing that is pitched at 7°

(If the Skylight is pitched higher than 15° when the roof pitch is added to the Flashing the Skylight still meets all the requirements.)






MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

-  Stainless Steel
-  Aluminium
-  Copper
-  Galvanised
-  Colorbond® Ultra

STANDARD FINISH

 Mill

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS


Detailed technical drawings available at skyspan.com.au/drawings

PRICES


Prices are available online at skyspan.com.au/velux-skylight-flashings




METALDECK

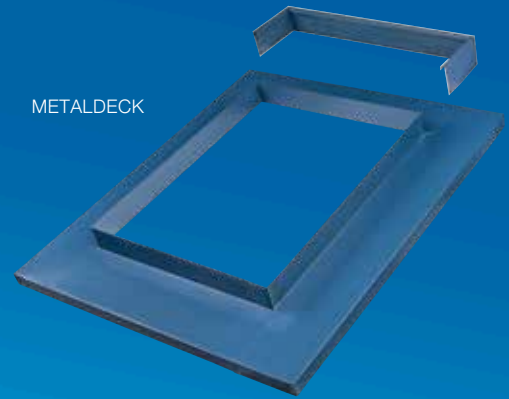

CORRUGATED

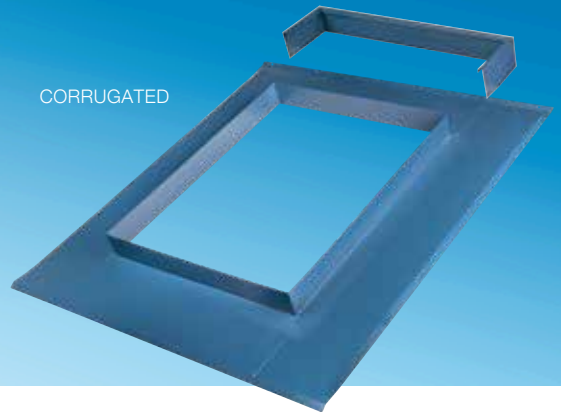

TILE

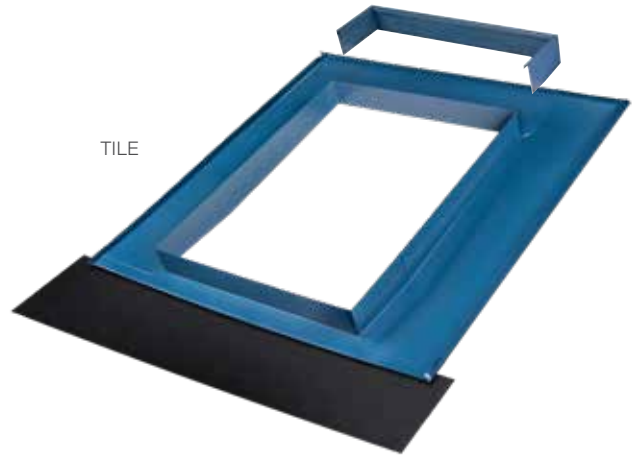

ROOF PITCH

Roof pitch range:



15°-90°

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

STANDARD FINISH

- Mill

CUSTOM FINISH

Powder coated to match **Colorbond®** colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings



METALDECK



ROOF PITCH

Roof pitch range:



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

- Stainless Steel
- Aluminium
- Copper
- Galvanised
- Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION


Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS


Detailed technical drawings available at skyspan.com.au/drawings

PRICES


Prices are available online at skyspan.com.au/velux-skylight-flashings

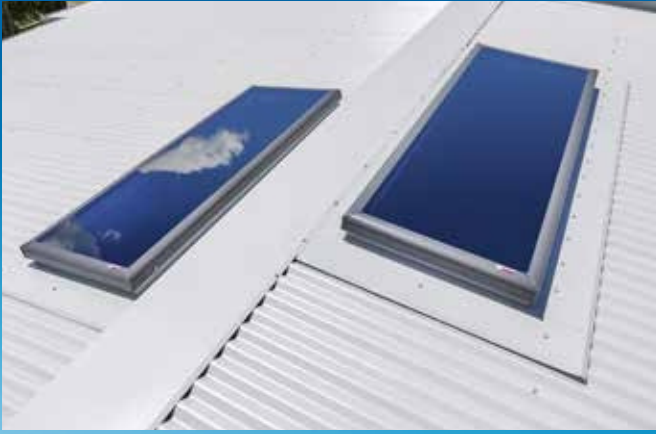


METALDECK

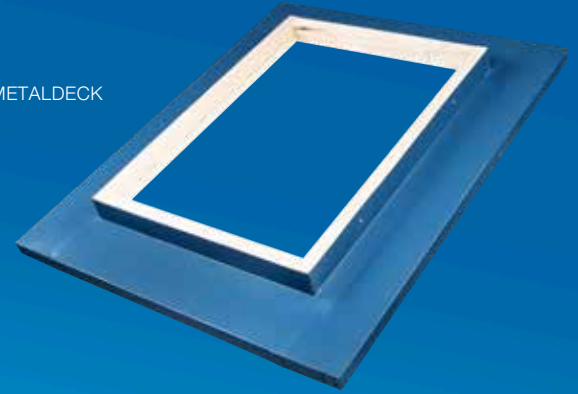

CORRUGATED

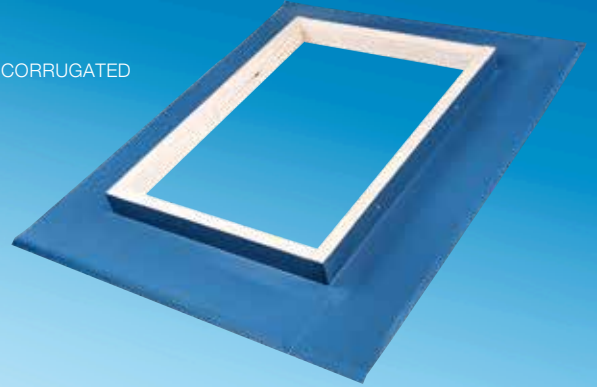

TILE

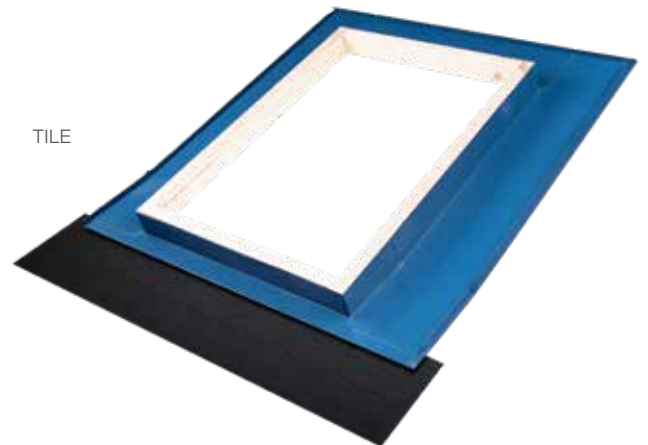

ROOF PITCH

Roof pitch range:



MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

Mill

CUSTOM MATERIAL OPTIONS

Stainless Steel Aluminium Copper
Galvanised Colorbond® Ultra

CUSTOM FINISH

Powder coated to match Colorbond colour range.

SIZES

All Velux Pitch Skylight sizes.

INSTALLATION


Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS


Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings

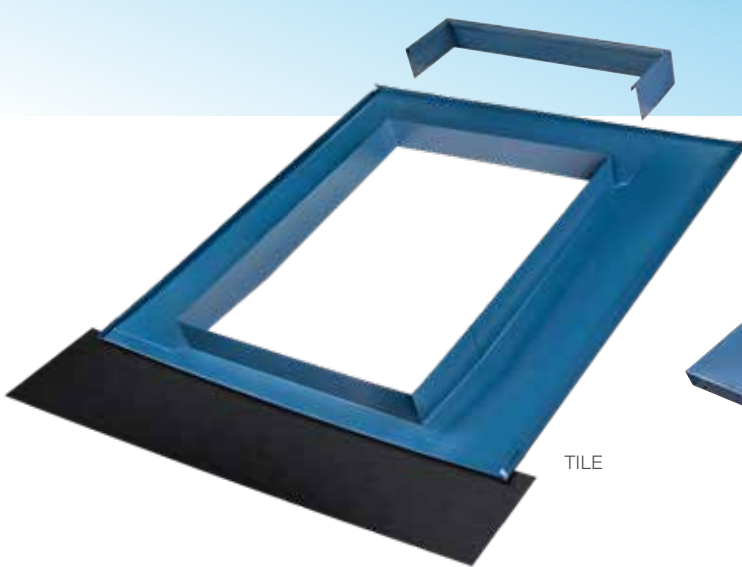

TILE

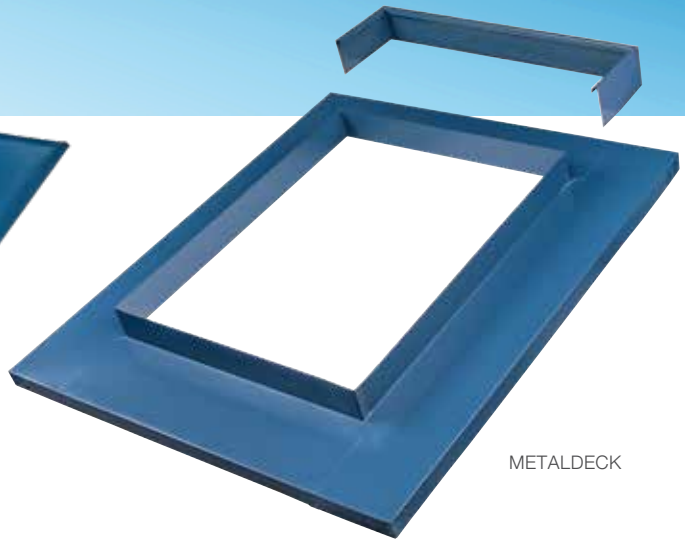

METALDECK

ROOF PITCH

Roof pitch range:  **15°-90°**

SIZES

All Velux Pitch Skylight sizes.

MANUFACTURE

Flashing and Lid

STANDARD MATERIALS

0.75mm Zinalume® steel spot welded for superior strength.

STANDARD FINISH

 Mill

CUSTOM MATERIAL OPTIONS

 Stainless Steel
  Aluminium
  Copper
 Galvanised
  Colorbond® Ultra

CUSTOM FINISH

Powder coated to match **Colorbond** colour range.

INSTALLATION

Detailed installation instructions available online at skyspan.com.au/installation

TECHNICAL DRAWINGS

Detailed technical drawings available at skyspan.com.au/drawings

PRICES

Prices are available online at skyspan.com.au/velux-skylight-flashings